



# MH 510 302/MH 510 502




5/2-way solenoid valve actuated by permanent signal and equipped with air spring return.

Available with solenoid operators:  
230V/50Hz, 110V/50Hz, 24V/50Hz, 48V=,  
24V=, 12V=.

Valves are generally equipped with manual override.  
If requested without manual override please order  
M 510 \_\_\_\_.

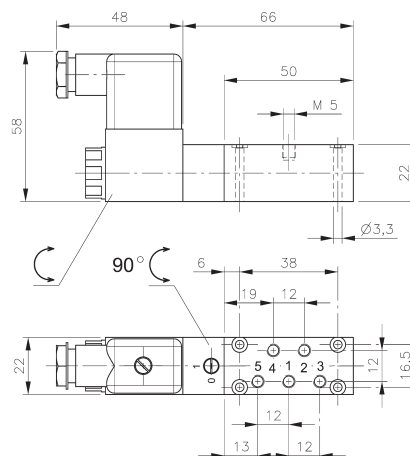

MH 510 302

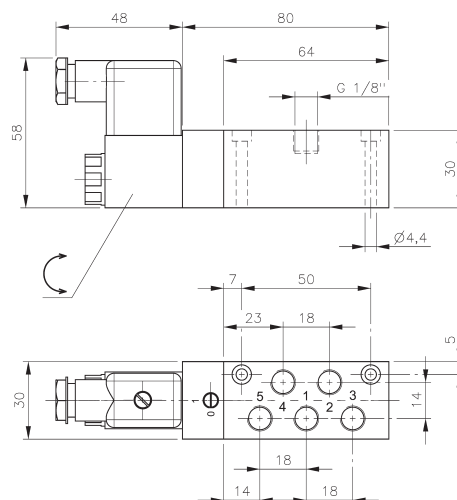

MH 510 502

| Type       | Port size | Air flow  | Operating press. | Power consumption | Weight  |
|------------|-----------|-----------|------------------|-------------------|---------|
| MH 510 302 | M5        | 180 l/min | 2 - 10 bar       | 3 W = / 5 VA ~    | 0,19 kg |
| MH 510 502 | G 1/8"    | 650 l/min | 2 - 10 bar       | 3 W = / 5 VA ~    | 0,30 kg |