

Sensor, Series ST9

- 9 mm groove
- Plug, M8, 3-pin
- Reed electronic PNP
- Direct mounting for series KHZ



Ambient temperature min./max.	See table below
Protection class	IP67, IP65
Switching point precision	±0,1 mT
Nominal current, actuated state	7 mA
Quiescent current (without load)	3 mA
Min./max. DC operating voltage	See table below
Min./max. AC operating voltage	See table below
LED status display	See table below
Vibration resistance	60 g (50 ... 2000 Hz)
Shock resistance	100 g / 11 ms

Technical data

Part No.		for	Type of contact	Min./max. DC operating voltage
0830100486		KHZ	Reed	10 ... 30 V DC
0830100487		KHZ	electronic PNP	12 ... 36 V DC

Part No.	Min./max. AC operating voltage	Voltage drop U at I _{max}
0830100486	10 ... 30 V AC	I*Rs
0830100487	-	≤ 2,0 V

Part No.	DC switching current, max.	AC switching current, max.
0830100486	0,13 A	0,2 A
0830100487	0,2 A	-

Part No.	Ambient temperature min./max.	Switching capacity	Protective resistor for reed
0830100486	-20 ... 80 °C	3 W / 5 VA	27 Ω
0830100487	-10 ... 70 °C	-	-

Part No.	Max. switching frequency	Operating current, not switched	LED status display
0830100486	-	-	Yellow
0830100487	2000 Hz	3 mA	Yellow, Yellow

Part No.	Version
0830100486	Protected against polarity reversal
0830100487	Protected against polarity reversal short circuit resistant

Technical information


If reed sensors are used, we recommend using a short-circuit protective device (SCPD).

Technical information

Material	
Housing	Polyamide

Dimensions

Dimensions

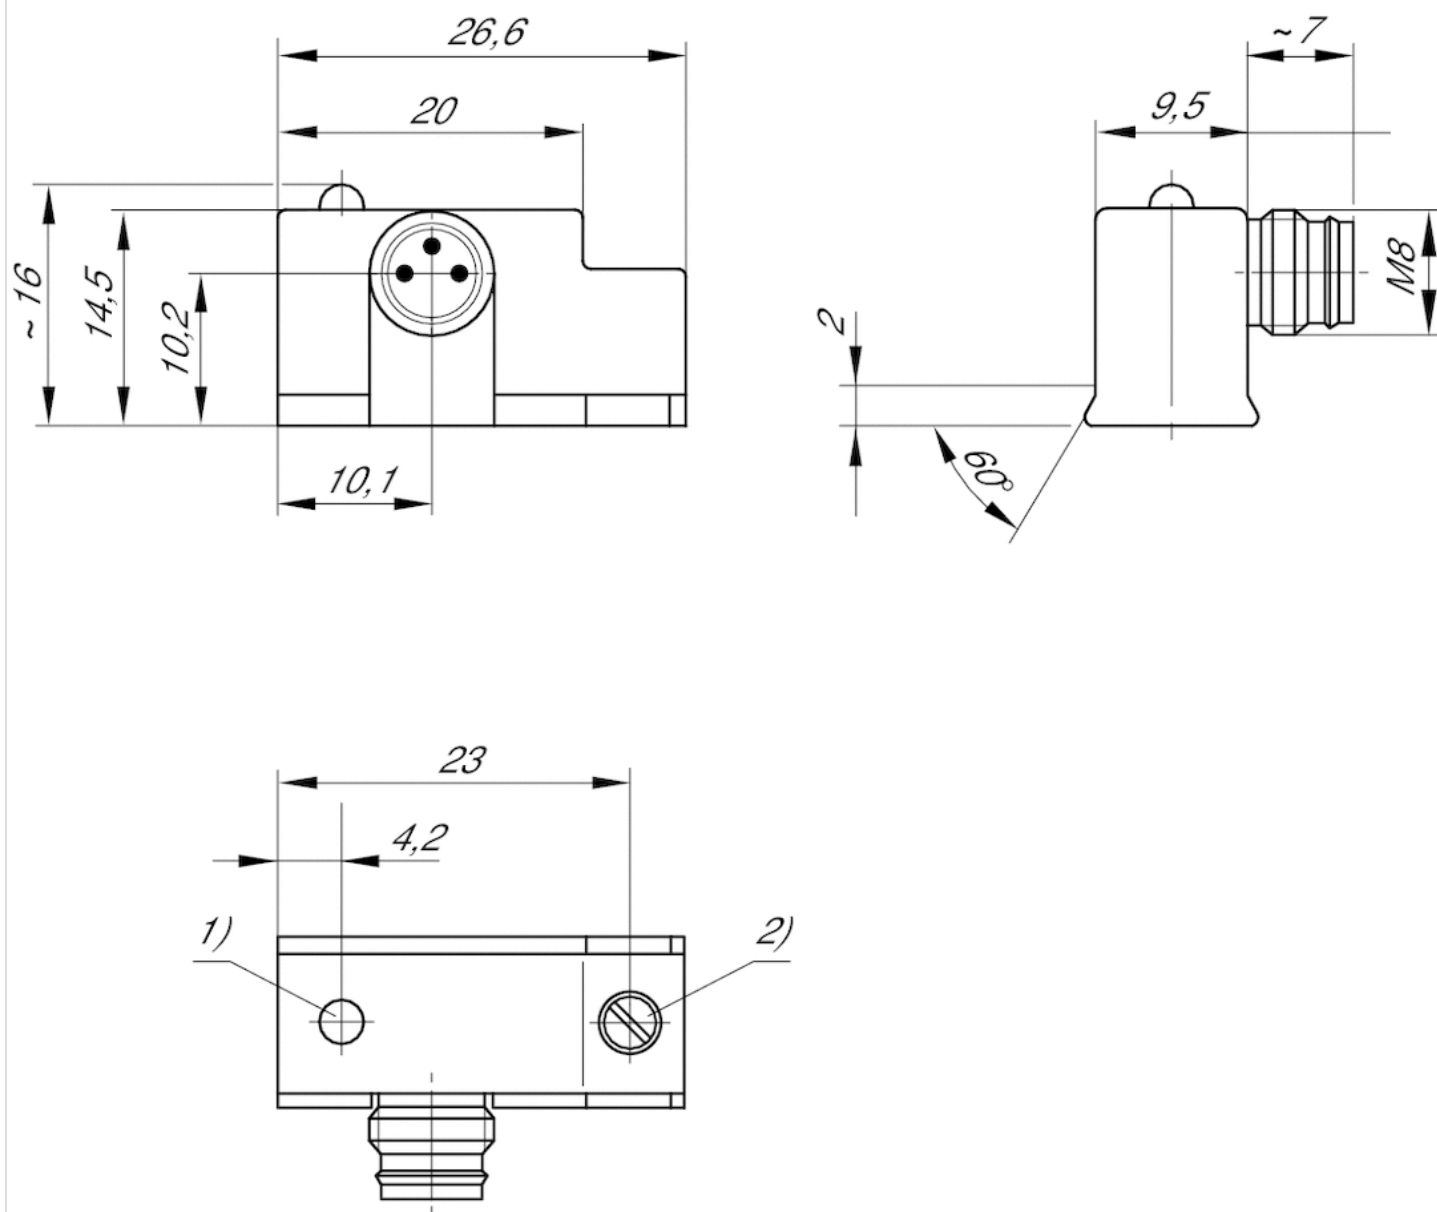


1) LED

2) Clamping screw

M8: combination plug can be combined with valve plug connectors Ø6.5 mm and M8.

Pin assignments

Pin assignments

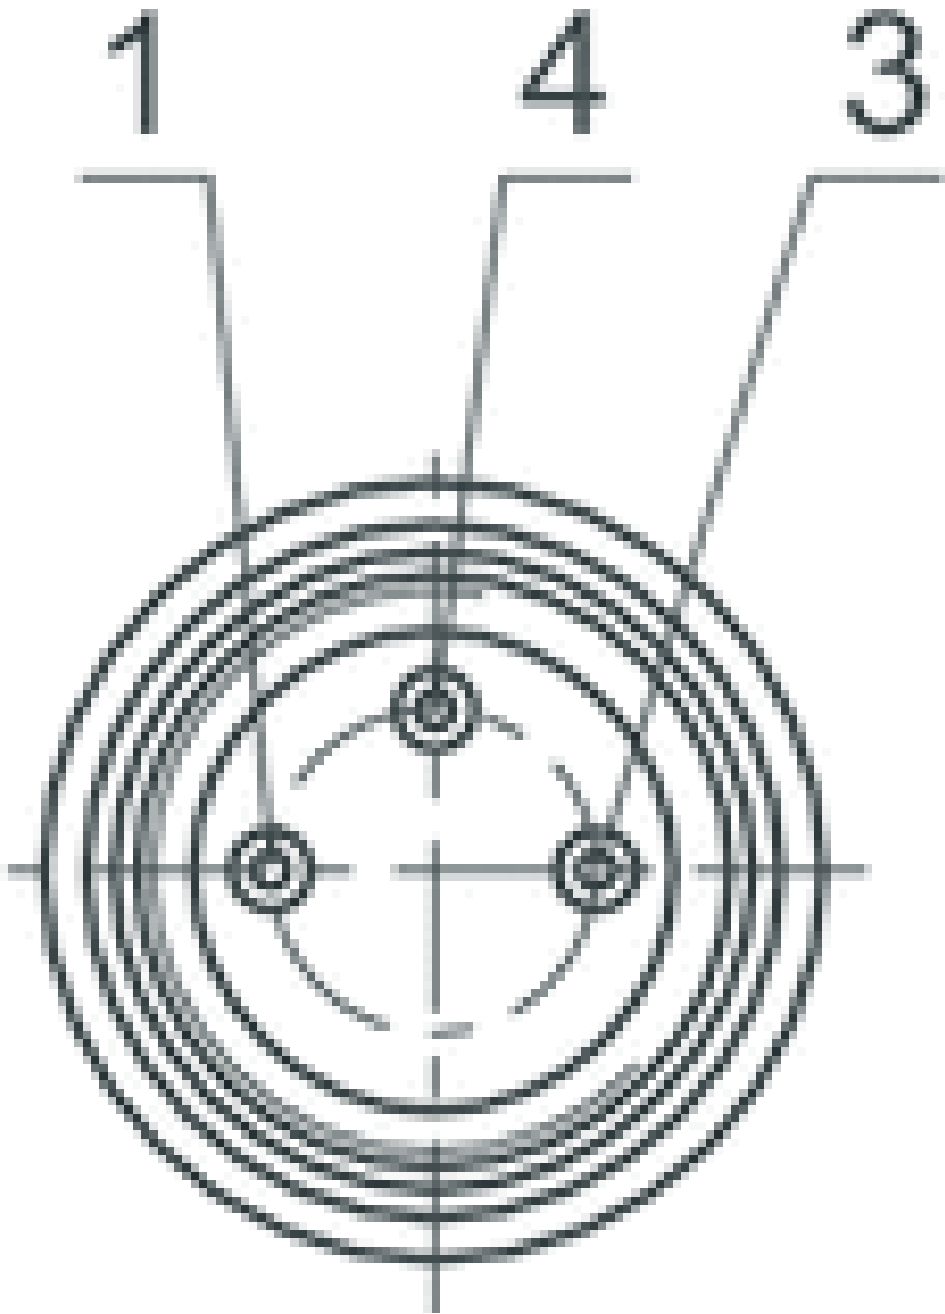

Pin	1	3	4
Allocation	(+)	(-)	(OUT)

Efficient pneumatic solutions, our program: cylinders and drives, valves and valve systems, air supply management



Visit us: [Emerson.com/Aventics](https://emerson.com/aventics)

Your local contact: [Emerson.com/contactus](https://emerson.com/contactus)



Emerson.com



Facebook.com/EmersonAutomationSolutions



LinkedIn.com/company/Emerson-Automation-Solutions



Twitter.com/EMR_Automation

An example configuration is depicted on the title page. The delivered product may thus vary from that in the illustration. Subject to change. This Document, as well as the data, specifications and other information set forth in it, are the exclusive property of AVENTICS GmbH. It may not be reproduced or given to third parties without its consent. Only use the AVENTICS products shown in industrial applications. Read the product documentation completely and carefully before using the product. Observe the applicable regulations and laws of the respective country. When integrating the product into applications, note the system manufacturer's specifications for safe use of the product. The data specified only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgement and verification. It must be remembered that the products are subject to a natural process of wear and aging.

The Emerson logo is a trademark and service mark of Emerson Electric Co. Brand logotype are registered trademarks of one of the Emerson family of companies. All other marks are the property of their respective owners. © 2020 Emerson Electric Co. All rights reserved.
2020-12



CONSIDER IT SOLVED™