

SVS VALVE PLUG FORM A 18MM FIELD-WIREABLE




24V LED+Z-Diode PG9

Form A (18 mm)
LED and Z-diode
24 V AC $\pm 20\%$ / DC $\pm 25\%$
PG9

Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.

Link to Product

Illustration

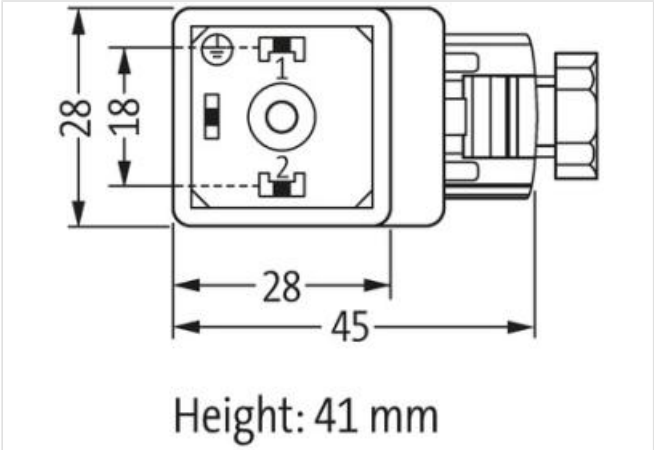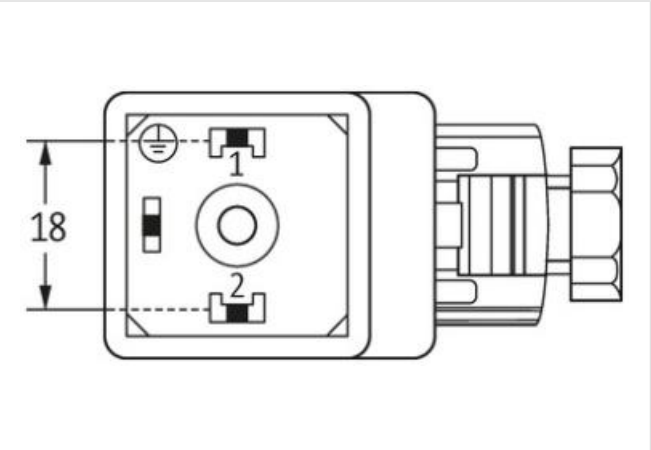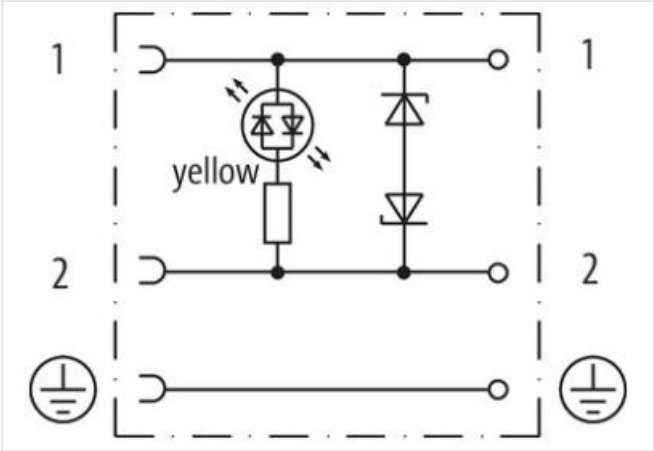

Product may differ from Image

Technical Data	
Operating voltage	24 V AC/DC
Operating current per contact	max. 4 A
LED display	yellow
Locking of ports	M3 (recommended torque 0.4 Nm)
Protection	IP65 inserted and tightened (EN 60529)
Configuration	2 contacts + PE
General data	
Temperature range	-20...+60 °C